


AP 210 D DECKING

STEEL PROFILE	
2012	Sheet 47.s.2
CI/SfB 27 Nh2	

PROFILE DESCRIPTION

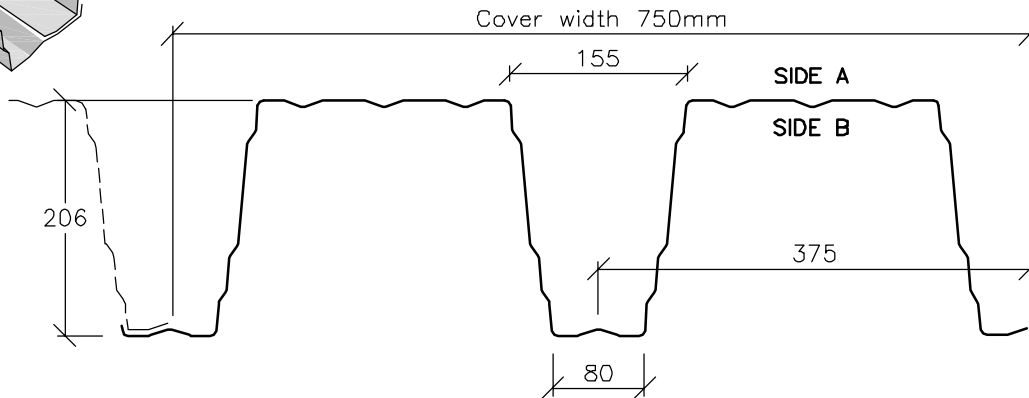

SECTION PROPERTIES

NOMINAL THICKNESS	mm	0.75	0.88	1.00	1.25	1.50
LOWER YIELD POINT	N/mm ²	320	320	320	320	320
MOMENT OF INERTIA	cm ⁴ /m	690	826	954	1227	1515
WEIGHT INCL. SIDE LAP	kg/m ²	11.7	13.81	15.70	19.63	23.55
MAXIMUM SHEET LENGTH	m	12	12	12	12	12

SPAN TABLES

(Deflection limited to Span/200) – Maximum safe working loads including safety factor of 1.5
For loads not deflection limited see page 2

Span (m)	Thk (mm)	Maximum Total Safe Working Load (kN/m ²)																
		5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75
Positive load ↓↓↓↓↓ ▲	0.75	1.90	1.82	1.73	1.63	1.53	1.45	1.36	1.29	1.20	1.12	1.04	0.97	0.91	0.86	0.81	0.76	0.72
	0.88	2.69	2.51	2.34	2.21	2.05	1.89	1.74	1.62	1.50	1.40	1.31	1.22	1.14	1.08	1.01	0.96	0.90
	1.00	3.43	3.17	2.89	2.64	2.42	2.23	2.06	1.91	1.78	1.66	1.55	1.45	1.36	1.28	1.20	1.13	1.05
	1.25	4.75	4.31	3.93	3.60	3.31	3.05	2.82	2.62	2.43	2.27	2.12	1.98	1.88	1.71	1.57	1.45	1.34
	1.50	5.75	5.22	4.77	4.36	4.00	3.69	3.41	3.16	2.94	2.74	2.56	2.39	2.25	2.08	1.92	1.77	1.64

(Deflection limited to Span/90) – Maximum safe working loads including safety factor of 1.5

Span (m)	Thk (mm)	Maximum Total Safe Working Load (kN/m ²)																
		5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75
Negative load ↑↑↑↑↑ ▲	0.75	1.59	1.53	1.46	1.41	1.36	1.31	1.26	1.22	1.18	1.14	1.11	1.08	1.04	0.98	0.93	0.88	0.84
	0.88	2.22	2.13	2.05	1.97	1.89	1.83	1.76	1.71	1.65	1.60	1.50	1.41	1.33	1.26	1.19	1.13	1.07
	1.00	2.83	2.71	2.60	2.50	2.41	2.33	2.25	2.17	2.04	1.91	1.80	1.69	1.60	1.51	1.43	1.36	1.29
	1.25	4.29	4.11	3.95	3.79	3.58	3.33	3.10	2.90	2.71	2.55	2.40	2.26	2.13	2.01	1.91	1.79	1.68
	1.50	6.02	5.67	5.23	4.83	4.48	4.17	3.88	3.63	3.40	3.19	3.00	2.83	2.67	2.52	2.35	2.19	2.05

Loads are **SAFE WORKING LOADS** and already incorporate a factor of safety therefore design loads do not need to incorporate any safety factor.

When using deck in conjunction with RAC bars as part of a twin skin roof build up – refer to APL for improved load/span characteristics.

Loads are for a minimum end support width of 90mm and intermediate support width of 200mm*, and can be from vertical downward loading or wind uplift. Higher values may be acceptable under certain conditions. Walkability must be taken into account when considering maximum span tables.

The normal maximum length of sheet for transport purposes is 15m. Longer lengths can be supplied, subject to negotiations. Please note that all dimensions and thicknesses are nominal as coated and/or as finished, and are subject to coil and manufacturing tolerances.

Please consult our experienced staff for all technical enquiries.

Whilst every endeavour is made to keep literature up to date, specifications may change without prior notice due to a policy of continued research and development.

Architectural Profiles Limited cannot be held responsible for the mis-use of span tables and its contents.

* Lesser support widths are structurally acceptable, but will effect the max permissible spans

E&OE

Architectural Profiles Ltd.

Cockayne House, 126–128 Crockhamwell Road, Woodley, Reading,
Berks. RG5 3JH. Telephone: 0118 927 2424 Fax: 0118 927 2400

